

Multi-Ton Self-Contained Unit

30,000 BTUs of Cooling or Heating



SVCD30K

The VCD30 is a seawater-cooled package unit with a single 30,000 BTU/hr compressor/condenser and dual 16,000 BTU/hr evaporator/HV blowers mounted back to back on a single platform. It is designed to provide maximum air conditioning capacity with a smaller footprint than two separate self-contained units. Return air is drawn from one or two compartments across both evaporator coils. Discharge air can be ducted to two or more different spaces.


Key Benefits

- Less expensive and less space than two separate units.
- Easier seawater hookup with no manifold required.
- HV blower.
- Stainless-steel chassis available (SVCD30).
- Exposed components coated with Heresite for corrosion protection.

Technical Specifications for Multi-Ton Self-Contained Unit

Model ⁽¹⁾	VCD30	
Capacity BTU/hr ⁽¹⁾	30,000	
Voltage (VAC)	208-230	220-240
Cycle (Hz)/Phase (Ph)	60/1	50/1
Full Load Amps (FLA) Cool	6.8	9.0
Full Load Amps (FLA) Heat	9.9	12.0
Locked Rotor Amps (Comp)	59.0	56.0
Kilo-Volt-Amps (KVA)	N/A	N/A
Max. Circuit Breaker (Amps)	N/A	N/A
Min. Circuit Ampacity (Amps)	N/A	N/A
Height (in/mm)	16.00/407	
Width (in/mm)	23.00/585	
Depth (in/mm)	25.00/635	
Min. Duct Size Dia.	N/A	
Min. Supply Grille (in ² /cm ²)	N/A	
Min. Return Grille (in ² /cm ²)	N/A	
Net Weight (lbs/kg)	130.0/59.0	
Gross Weight (lbs/kg)	145.0/65.8	

Notes:
⁽¹⁾ BTU and electrical data are based on a 45°F/7.2°C evaporator and 100°F/37.8°C condenser in cool mode, and a 45°F/7.2°C evaporator and 130°F/54.4°C condenser in heat.

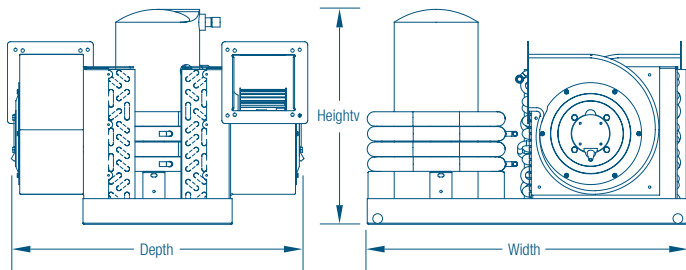

DOMETIC MARINE DIVISION

2000 N. Andrews Ave. Ext. I Pompano Beach, FL 33069 USA | 954-973-2477 | Fax 954-979-4414
 www.DometicUSA.com | MarineSales@DometicUSA.com

24/7 Tech Support for United States & Canada:

8:00 AM to 5:00 PM Eastern Time: 800-542-2477
 After hours and weekends: 888-440-4494

International Sales & Service:

Europe & the Middle East: Call +44(0)870-330-6101
 For all other areas visit our website to find your nearest distributor.

Dealer:



COMPACT SERIES MULTI-TON AIR CONDITIONING

High-capacity air conditioning in a compact package



27,000 BTU/hr Compact unit shown


The Compact series of self-contained marine air conditioners offers 18,000 and 27,000, and 30,000 BTU/hr of reverse-cycle cooling and heating.

These high-capacity units were engineered to harness and maximize the impressive performance of environmentally safe R-410A refrigerant. Used in the HVAC industry for more than 10 years, R-410A is proven and reliable, complies with all EPA standards, and is accepted worldwide.

All models offer direct expansion operation in a compact, low-profile unit, with a seawater-cooled condenser and choice of controls. Compact units are designed for installation under a settee or berth, in a locker or cabinet, or other convenient location.

Compact systems feature high-velocity (HV) blowers. All blowers are insulated to prevent secondary condensation, and are fully rotatable for flexibility during installation. A stainless-steel chassis is standard on all Compact models.

The 30,000 BTU/h model features dual evaporator coils and a single compressor on a single chassis. The dual high-velocity (HV) blowers can be ducted to two or more interior spaces.



The dual-blower 30,000 BTU/hr unit with stainless-steel chassis.

KEY BENEFITS

- Compact design reduces unit size by up to 25% of the original Vector Rotary's size
- High-velocity (HV) fully-insulated blowers are rotatable
- Patented design increases cooling capacity and dehumidification
- Engineered to maximize the performance of R-410A, an environmentally safe refrigerant
- Unique compressor and reversing valve mounting reduces vibration
- Electrical box is installed within unit footprint on 18K and 27K models; remotely mounted for 30K models
- High-efficiency rotary and scroll compressors are quiet and more reliable
- Condenser coil's cupronickel-encased copper condenser coil provides maximum heat transfer and high resistance to corrosion
- Evaporator coil employs an enhanced fin design and rifled copper tubing to provide maximum capacity
- 27K and 30K models available in 3-phase power on a special order basis
- 5 ft. (1.5 m) air sensor standard
- Operates with selected displays

SPECIAL OPTIONS

- Display cable



Mobile living made easy.

SPECIFICATIONS

Model ⁽¹⁾	DCU18			DCU27		SVCD30	
Capacity (BTU/h) ⁽²⁾	18000			27000		30000	
Voltage (V)	115	230	220	230	220	230	380
Cycle (Hz) ⁽³⁾ /Phase (Ph)	60/1		50/1	60/1	50/1	60/1	50/3
Full Load Amps (FLA) Cool (A)	11.1	6.4	5.7	8	7.6	9.7	4.96
Full Load Amps (FLA) Heat (A)	15.1	8.3	7	11.2	11	12.8	5.96
Full Load Amps (FLA) Blower (A)	1.93	1.15		1.64		1.76	1.56
Locked Rotor Amps (LRA) (A)	66	32	26	58.3	60	53	38
Max. Circuit Breaker (A)	45	20		45	40	35	15
Min. Circuit Ampacity (A)	27	13		27	24	21	10
Refrigerant Type	410A			410A		410A	
Height-Coil (in/mm) ⁽⁴⁾	14/356			18/458		N/A	N/A
Height-Blower (in/mm) ⁽⁴⁾	15.5/394			19.25/489		N/A	N/A
Height-Compressor (in/mm) ⁽⁴⁾	N/A			N/A		15/381	16.5/420
Width (in/mm) ⁽⁴⁾	21/534			24.75/629		25/635	
Depth (in/mm) ⁽⁴⁾	12/305			15.25/388		23/585	
Min. Supply Duct Size (in/mm)	7/178			8/204		5/127	
Quantity-Duct Connections	1			1		2	
Min. Supply Air Grille Size (sq in/sq cm)	100/646			140/904		150/968	
Min. Return Air Grille Size (sq in/sq cm)	200/1291			240/1549		250/1613	
Seawater Inlet Connection (in/mm)	5/8/16			5/8/16		5/8/16	
Net Weight (lbs/kg) ⁽⁵⁾	64/29.1	69.45/31.6	70/31.8	120/54.5		108.25/49.2	TBD
Gross Weight (lbs/kg) ⁽⁵⁾	73/33.2	81/36.8	82/37.2	130/59		125/57.4	TBD

¹ To complete the model numbers for a specific voltage/cycle/phase, add a '-1161' for 115V/60Hz/1-Phase, or '-2361' for 230V/60Hz/1-Phase, followed by '-410A' (e.g. 'DCU27-2361-410A').

² BTU and electrical data are based on a 45°F/7.2°C evaporator and 100°F/37.8°C condenser in cool mode, and a 45°F/7.2°C evaporator and 130°F/54.4°C condenser in heat mode.


³ 60Hz units must not operate at 50Hz and 50Hz units must not operate at 60Hz unless data plate states otherwise.

⁴ All dimensions ± 0.30 in. (8 mm).

⁵ All weights ± 10%

DIMENSIONS

Single-Blower 18,000 & 27,000 BTU/h Models

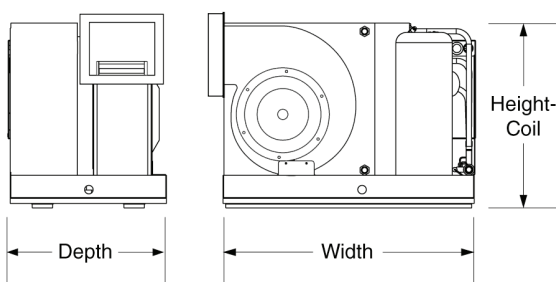

Dual-Blower 30,000 BTU/h Model

