

CLIMATE

TWCX TITANIUM CHILLERS

A high-performance chiller, this reverse-cycle unit cools and heats, and is available in a wide range of models. Uses R410A, the preferred environmentally safe refrigerant.

ULTRA DURABLE

TITANIUM CONDENSER

REVERSE CYCLE

COOLS & HEATS

ADVANCED COMPONENTS

SUPERIOR PERFORMANCE



230V/60Hz/1-Ph or 3-Ph
220-240V/50Hz/1-Ph
460V/60Hz/3-Ph
380V/50Hz/3-Ph



24,000 - 72,000 BTU

Mobile living made easy.

 **DOMETIC**

ENCLOSED MODULAR CHILLERS WITH A COMPACT

Model ¹	TWCX24		TWCX30			TWCX36				
Capacity (BTU/h)	24000		30000			36000				
Voltage (V) ²	220	380	230	220	230	220	460	230	230	380
Cycle (Hz)/Phase (Ph)	50/1	50/3	60/3	50/1	60/1	50/1	60/3	60/1	60/3	50/3
Full Load Amps (FLA) Cool (A)	9.5	3.5	7.2	10.3	9.1	9.6	3.9	12	8.3	5.1
Full Load Amps (FLA) Heat (A)	11.8	4.6	9.1	12	13.2	12.7	5	15.7	10.9	6.6
Locked Rotor Amps (LRA) (A)	63	45	73	63	96.7	63	45	105	95	50
Max. Circuit Breaker (A)	45	20	35	45	60	45	20	70	50	27
Min. Circuit Ampacity (A)	28	13	21	28	34	28	13	43	27	15
Refrigerant Type	R410A		R410A			R410A				
Height-Without Elec. Box (in/mm) (3)	18.6/473		18.6/473			18.6/473				
Height-With Elec. Box (in/mm) (3)	22.6/575		22.6/575			22.6/575				
Max. Width (in/mm) (3)	13/331		13/331			13/331				
Depth-Drain Pan (in/mm) (3)	18/458		18/458			18/458				
Max. Depth (in/mm) (3)	19.4/493		19.4/493			19.4/493				
Seawater Inlet Connection (in/mm)	0.625/16		0.625/16			0.625/16				
Chilled Water Inlet Connection (in/mm)	0.75/20		0.75/20			0.75/20				
Chilled Water Outlet Connection (in/mm)	1/26		1/26			1/26				
Chilled Water Connection Type	FPT		FPT			FPT				

¹ Add a 'C' for 230V/60Hz/1-Ph, 'CK' for 220-250V/50Hz/1-Ph, 'DC' for 230V/60Hz/3-Ph, 'ECK' for 380V/50Hz/3-Ph, or 'EC' for 460V/60Hz/3-Ph. For example, TWCX24DC = 230V/60Hz/3-ph unit.

² For information about voltages not shown in this sheet, please contact Dometic Marine sales at 954-973-2477.

³ All dimensions ± 0.30 in/8 mm.

TWCX48					TWCX60					TWCX72			
48000					60000					72000			
460	230	220	230	380	460	230	220	230	380	230	230	460	380
60/3	60/1	50/1	60/3	50/3	60/3	60/1	50/1	60/3	50/3	60/1	60/3	60/3	50/3
5.2	13.8	14.7	11.3	5.8	5.9	15.8	22.2	11.3	8.3	20.1	16.2	7.1	10.1
6.6	20.2	21.4	12.7	7.6	7.4	23	29.1	14.8	10.8	29.3	20.1	8.9	13.3
60	150	130	120	70	70	145	130	123	87	145	160	87	100
30	80	90	55	30	33	101	100	60	42	90	81	42	42
17	48	50	33	19	19	57	57	34	24	53	45	24	24
R410A					R410A					R410A			
23.4/595					23.4/595					23.4/595			
23.4/595					23.4/595					23.4/595			
13.3/338					13.3/338					13.3/338			
18/458					18/458					18/458			
23.9/608					23.9/608					23.9/608			
1.25/32					1.25/32					1.25/32			
1/26					1/26					1/26			
1/26					1/26					1/26			
FPT					FPT					FPT			

ENCLOSED MODULAR CHILLERS WITH A COMPACT FOOTPRINT



1. EXPANDABLE

Units can be multiplexed for larger capacity



2. SEAWORTHY

Stainless steel-reinforced seawater connections



3. SERVICEABLE

Service ports accessible from outside the chiller cabinet



4. INNOVATIVE DESIGN

Inlet and outlet CW temperature sensors



5. SPACE SAVING

Compact footprint for installation flexibility

Cruisair TWCX Titan Series Modular Chillers

Compact Enclosed Chillers With Titanium Durability



Cruisair TWCX Titan compact modular chillers use titanium condensers to greatly increase durability and product lifespan. Titanium is unaffected by the punishing combination of saltwater, invasive marine life, and the harsh acids used for routine cleaning of the condenser coil. Titan service life is greatly extended compared to cupronickel systems—the industry standard—which inevitably suffer catastrophic failure from corrosion and erosion in the harsh marine environment.

The TWCX is a high-performance, cost effective tempering unit. The reverse-cycle TWCX cools and heats, and is available in an expanded product range of 24,000 (2-ton) to 72,000 (6-ton) BTU/hr capacities. Units can be multiplexed for even larger capacities as required.

Each unit includes a chilled water (CW) flow switch, refrigerant high- and low-refrigerant pressure switches, and inlet and outlet CW temperature sensors. The TWCX does not include a chilled water modulating flow control, which means air handlers with or without flow controls can be used.*

On 2- to 3-ton units, an electrical box mounted on top of the chiller houses the control board as well as starting components, and can be mounted remotely up to 6 ft. (1.8 m) away. On 4- to 6-ton units, the electric box is normally contained within the enclosure and does not contribute to height. A remote electric box is available upon request for 4- to 6-ton units.

Two control systems are available. The standard control is our proven Digital Diagnostic Control (DDC) that provides simple, single-stage operation. For multiplexed systems, the Tempered Water Logic Control (TWLC) with LCD screen is available. Depending on the configuration, additional cables, switches, sensors, or a display may be required.

*On larger boats we always recommend using flow-controlled air handlers to ensure proper water distribution. A balancing flow control (BFC) is not needed when using TWC chillers.



TWCX modular chillers have a compact footprint and feature a fully enclosed design.

Key Benefits

- Titanium condenser resists erosion and corrosion
- Titanium condenser increases durability and product lifespan
- Compact, enclosed design
- Reverse-cycle heating
- High-efficiency rotary or scroll compressors
- Includes flow switch, high- and low-pressure switches, and inlet and outlet circulated water temperature sensors
- Large heat exchangers for superior performance in booth cooling and heating
- Engineered to maximize the performance of R-410A, an environmentally safe refrigerant
- Electrical box can be mounted remotely for 2-ton and 3-ton models

Specifications for Cruisair TWCX Titan Series Modular Chillers

Model ⁽¹⁾	TWCX24		TWCX30			TWCX36				TWCX48				TWCX60					TWCX72					
Capacity (BTU/h)	24000		30000			36000				48000				60000					72000					
Voltage (V) ⁽²⁾	220	380	230	220	230	220	460	230		380	460	230	220	230	380	460	230	220	230	380	230		460	380
Cycle (Hz)/Phase (Ph)	50/1	50/3	60/3	50/1	60/1	50/1	60/3	60/1	60/3	50/3	60/3	60/1	50/1	60/3	50/3	60/3	60/1	50/1	60/3	50/3	60/1	60/3		50/3
Full Load Amps (FLA)	9.5	3.5	7.2	10.3	9.1	9.6	3.9	12	8.3	5.1	5.2	13.8	14.7	11.3	5.8	5.9	15.8	22.2	11.3	8.3	20.1	16.2	7.1	10.1
Cool (A)																								
Full Load Amps (FLA)	11.8	4.6	9.1	12	13.2	12.7	5	15.7	10.9	6.6	6.6	20.2	21.4	12.7	7.6	7.4	23	29.1	14.8	10.8	29.3	20.1	8.9	13.3
Heat (A)																								
Locked Rotor Amps (LRA) (A)	63	45	73	63	96.7	63	45	105	95	50	60	150	130	120	70	70	145	130	123	87	145	160	87	100
Max. Circuit Breaker (A)	45	20	35	45	60	45	20	70	50	27	30	80	90	55	30	33	101	100	60	42	90	81	42	
Min. Circuit Ampacity (A)	28	13	21	28	34	28	13	43	27	15	17	48	50	33	19	19	57		34	24	53	45	24	
Refrigerant Type	R410A		R410A			R410A				R410A				R410A					R410A					
Height-Without Elec. Box (in/mm) ⁽³⁾	18.6/473		18.6/473			18.6/473				23.4/595				23.4/595					23.4/595					
Height-With Elec. Box (in/mm) ⁽³⁾	22.6/575		22.6/575			22.6/575				23.4/595				23.4/595					23.4/595					
Max. Width (in/mm) ⁽³⁾	13/331		13/331			13/331				13.3/338				13.3/338					13.3/338					
Depth-Drain Pan (in/mm) ⁽³⁾	18/458		18/458			18/458				18/458				18/458					18/458					
Max. Depth (in/mm) ⁽³⁾	19.4/493		19.4/493			19.4/493				23.9/608				23.9/608					23.9/608					
Seawater Inlet Connection (in/mm)	3/8 /16		3/8 /16			3/8 /16				1/4 /32				1/4 /32					1/4 /32					
Chilled Water Inlet Connection (in/mm)	3/4 /20		3/4 /20			3/4 /20				1/26				1/4 /32					1/4 /32					
Chilled Water Outlet Connection (in/mm)	1/26		1/26			1/26				1/26				1/4 /32					1/4 /32					
Chilled Water Connection Type	HB		HB			HB				FPT				FPT					FPT					


¹ Add a 'C' for 230V/60Hz/1-Ph, 'CK' for 220-250V/50Hz/1-Ph, 'DC' for 230V/60Hz/3-Ph, 'ECK' for 380V/50Hz/3-Ph, or 'EC' for 460V/60Hz/3-Ph. For example, TWCX24DC = 230V/60Hz/3-ph unit.

² For information about voltages not shown in this sheet, please contact Dometic Marine sales at 954-973-2477.


³ All dimensions ± 0.30 in. (8 mm).

Dimensions

TWCX 24,000 - 36,000 BTU/h Models

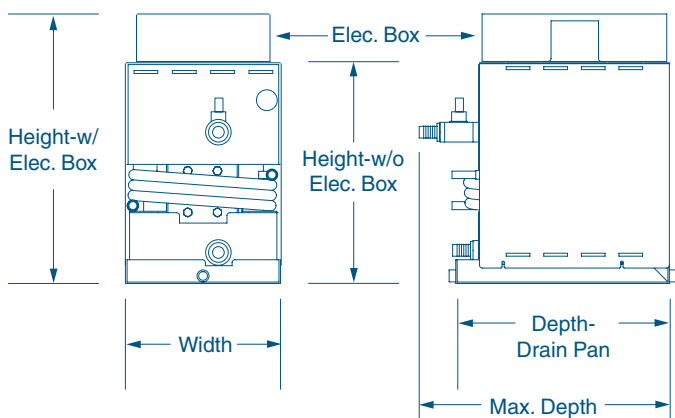

TWCX 48,000 - 72,000 BTU/h Models

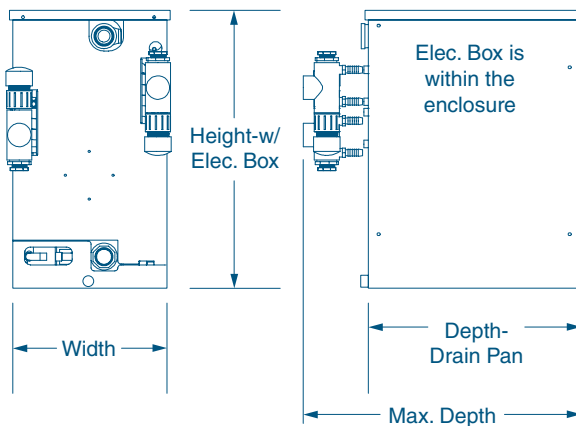

DOMETIC MARINE DIVISION

2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:

8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES

Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

Dealer

